


SINGLE HUNG WINDOWS 800 SERIES

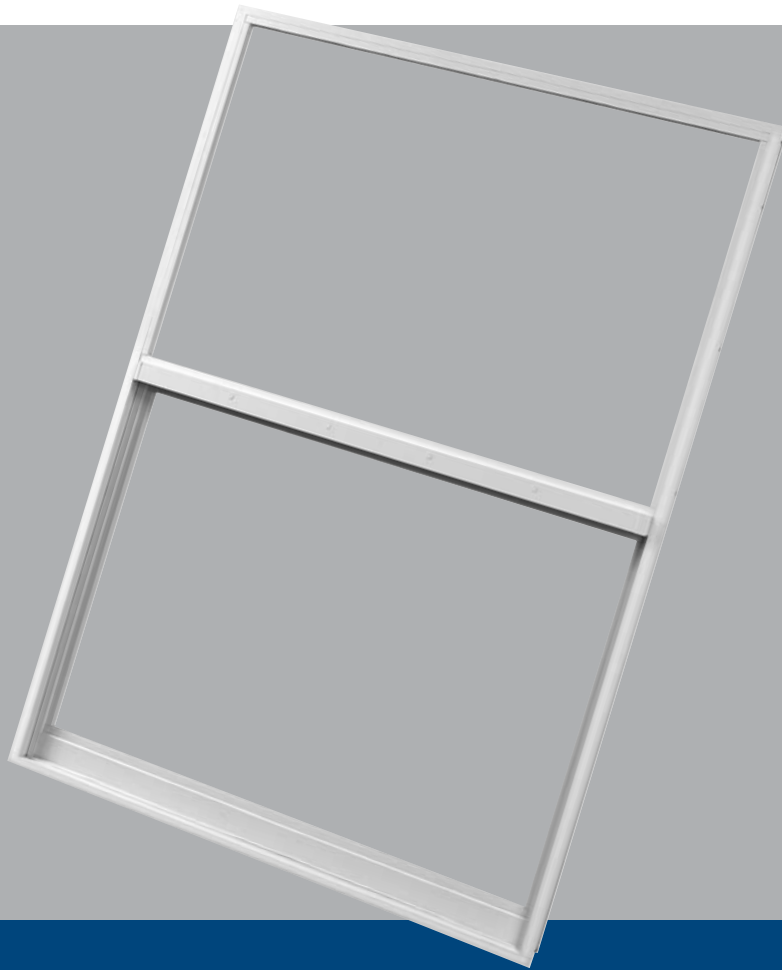

FEATURES & BENEFITS

- Dual lift rail for ease of operation
- Die cast sash lock for strength and security
- Weep slots for efficient water drainage
- Rigid vinyl reinforcing wind clips for greater strength and wind rattle reduction
- 2³/₄" nominal frame depth
- Bottom sill locks available for egress
- Available with limited travel sash stop

PRODUCT SPECIFICATIONS - SH800

TEST TYPE	FRAME TYPE & MAXIMUM SIZE	FRAME DEPTH	POSITIVE DESIGN PRESSURE	NEGATIVE DESIGN PRESSURE	WATER RESISTANCE	AIR INFILTRATION	GLAZING	TESTS COMPLETED
LARGE MISSILE	FLANGE: 53 ¹ / ₈ " x 76"	2 ³ / ₄ "	+90	-110	13.5 psf	0.08 @ 1.57	• 7 ¹ / ₁₆ " SGP Laminated (Heat Strengthened/Heat Strengthened)	• Miami-Dade NOA: 07-0801.03 • Forced Entry Resistance: AAMA 1302.5
SMALL MISSILE	FLANGE: 53 ¹ / ₈ " x 76"	2 ³ / ₄ "	+90	-150	13.5 psf	0.17 @ 1.57	• 3 ¹ / ₈ " PVB Laminated (Annealed/Tempered)	• Miami-Dade NOA: 07-0306.11 • Florida Product Approval: FL-239 • Forced Entry Resistance: AAMA 1302.5
NON-IMPACT	FLANGE: 53 ¹ / ₈ " x 76"	2 ³ / ₄ "	+80	-110	12.0 psf	0.08 @ 1.57	• 3 ¹ / ₁₆ " Monolithic (Tempered) • 1 ¹ / ₄ " Monolithic (Tempered)	• Florida Product Approval: FL-9644.1